

## MAIN FEATURES

- Wide input voltage range (249-528 V<sub>AC</sub>)
- 400 W rated power (420 W peak)
- Extremely high efficiency (93% typical)
- Low stand-by consumption (<2.8 W at 480 V<sub>AC</sub>)
- 24, 36 or 48 V<sub>DC</sub> standard output variants
- Active PFC, EN61000-3-2 Class C at >100 W load
- Low earth leakage current
- Over temperature protection
- OV, OC, and short circuit protections
- +5 V<sub>DC</sub>, 2 A stand-by output
- +12 V<sub>DC</sub>, 1 A auxiliary / fan output
- Remote On / Off and power good signals
- RoHS-6 compliant (EU directive 2015/863/UE)
- 4000 m altitude operation



**IP67**



## DESCRIPTION

DDP400HV is a series of high efficiency, small form factor AC-DC power supplies operating at 277/347/480V<sub>AC</sub> inputs.

The series provides a steady 400 W of regulated DC power through the full input range of 249 to 528 V<sub>AC</sub>. Available in 24, 36 and 48 V models. Each model includes an auxiliary 12V<sub>DC</sub> and 5V<sub>DC</sub> stand-by outputs. Control signals include AC\_OK and remote on/off.

The DDP400HV series comes in an IP67 sealed enclosure with flying leads for both input and output. An optional heat-sink is available or the DDP400HV may be installed directly to the end equipment with heat transferred by conduction.

By converting energy at 93% typical efficiency, the DDP400HV series generates less heat facilitating thermal management in space constrained system and offering high reliability.


Full output power rating from -35 to 50 °C, with operation up to 70 °C with de-rating and is capable to start up from -40 °C.

## MARKET SEGMENT AND APPLICATIONS

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Large Format Display Power</li> <li>• Large Venues and Stadium Lighting</li> <li>• High Powered Street Lighting</li> <li>• Large Area Parking</li> </ul> | <ul style="list-style-type: none"> <li>• High Bay Industrial Space</li> <li>• Architectural Lighting</li> <li>• Outdoor Lighting</li> <li>• Horticultural Lighting</li> </ul> |
|---|---|

## MODEL CODING AND OUTPUT RATINGS

Model Grade and Output Power	Output Nominal Voltage	Package/Fan Options
DDP400HV-	24 V <sub>DC</sub> : <b>US24-</b>	Sealed Conduction/Convection Cooling: <b>SC</b>
DDP400HV-	36 V <sub>DC</sub> : <b>US36-</b>	
DDP400HV-	48 V <sub>DC</sub> : <b>US48-</b>	

DP400HV	-	US	-	SC	Heat-sink can be ordered as an accessory using the code:  <b>RHPS384PH-3</b>  Mounting kit includes 4x screws (M4x8), 4x split washer and a thermally conductive graphite sheet		
							24
							36
							48


Model Number	V1 [V]	I1 <sup>1</sup> without heatsink [A]	I1 <sup>2</sup> with heatsink [A]	V1 <sup>3</sup> Ripple [mV]	V2 [V]	I2 <sup>1</sup> without heatsink [A]	I2 <sup>2</sup> with heatsink [A]	V2 <sup>3</sup> Ripple [mV]	5V <sub>SB</sub> [V]	I5V <sub>SB</sub> <sup>1</sup> without heatsink [A]	I5V <sub>SB</sub> <sup>2</sup> with heatsink [A]	5V <sub>SB</sub> <sup>3</sup> Ripple [mV]
DDP400HV-US24-SC	24	13.33	16.66	240	12	1	1	240	5	2	2	50
DDP400HV-US36-SC	36	8.88	11.11	360	12	1	1	240	5	2	2	50
DDP400HV-US48-SC	48	6.66	8.33	480	12	1	1	240	5	2	2	50

<sup>1</sup> The combined output power of V1, V2 and 5 V<sub>SB</sub> without the optional heat-sink, must not exceed 400 W at 25 °C, 320 W at 50 °C, and 215W at 70 °C ambient temperature (480 V<sub>AC</sub>). See de-rating curves below.

<sup>2</sup> The combined output power of V1, V2 and 5 V<sub>SB</sub> with the optional heat-sink must not exceed 400 W up to 50 °C and 275 W at 70 °C ambient temperature (480 V<sub>AC</sub>). See de-rating curves below.

<sup>3</sup> Peak-to-Peak measured at 20 MHz Bandwidth.

**All ratings in the table above refer to 480 V<sub>AC</sub> and 50 °C ambient temperature.  
In any case, the chassis hot spot temperature T<sub>c</sub> shall never exceed 90 °C**

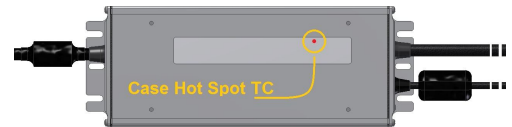


## INPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
<b>AC Input Voltage</b>	PS starts and operates at 249 V <sub>AC</sub> at all load conditions	249	277/347/480	528	V <sub>AC</sub>
<b>DC Input Voltage</b>		300	365	400	V <sub>DC</sub>
<b>Input Frequency</b>		47	50/60	63	Hz
<b>Input Current</b>	RMS at 249 V <sub>AC</sub> , maximum load	-	-	1.8	A
<b>Inrush Current (peak)</b>	Peak at 480 V <sub>AC</sub> , cold start, no damage	-	-	60	A
<b>Fusing</b>	2X Time Lag, 500 V <sub>AC</sub> /400Vdc on ACL1 and ACL2	-	-	5.0	A
<b>Efficiency</b>	480 V <sub>AC</sub> at 20% load	-	89.0	-	%
	480 V <sub>AC</sub> at 50% load	-	92.6	-	
	480 V <sub>AC</sub> at 100% load	-	93.5	-	
	277 V <sub>AC</sub> at 20% load	-	89.6	-	
	277 V <sub>AC</sub> at 50% load	-	92.5	-	
	277 V <sub>AC</sub> at 100% load	-	92.6	-	
<b>Input Power Consumption</b>	Power on, 480 V <sub>AC</sub> , no load	-	3.9	4.5	W
	Stand by, 480 V <sub>AC</sub> , no load	-	2.8	3.3	
<b>Power Factor</b>	From 50% to 100% rated load, 277/347/480 V <sub>AC</sub> , 50 / 60 Hz	0.90	-	-	-
<b>THD</b>	From 50% to 100% rated load, 277/347/480 V <sub>AC</sub> , 50 / 60 Hz	-	-	20	%
<b>Harmonic Current Fluctuations and Flicker</b>	Complies with EN-61000-3-2 Class C 277/347/480 V <sub>AC</sub> , 50 / 60 Hz, load >100 W				
<b>Leakage Current</b>	Complies with EN-61000-3-3 at 277/347/480 V <sub>AC</sub> , 50 / 60 Hz, full load				
	Normal operation, 480 V <sub>AC</sub> , 60 Hz	-	-	750	μA
	Neutral connected to Earth				

**OUTPUT SPECIFICATIONS**

Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
<b>V1 Output Voltage</b>	+RS closed on +V1, 6 % rated load 24 V (0.5 % set point accuracy) 36 V (0.5 % set point accuracy) 48 V (0.5 % set point accuracy)	-	24 36 48	-	V
<b>V1 Output Power Rating</b>	All models (see output de-rating curves) Peak (less than 10 seconds, after P_OK high)	-	-	400 420	W
<b>V2 Output Voltage</b>	All models Load on V2: from 5 to 1000 mA Load on V1: from 0.1 A to I1 rated	11.25	12.5	13.75	V
<b>V2 Output Current</b>	All models	-	-	1	A
<b>5V<sub>SB</sub> Output Voltage</b>	All models (3% set point accuracy)	-	5	-	V
<b>5V<sub>SB</sub> Output Current</b>	All models	-	-	2	A
<b>V1 Load-Line-Cross Regulation</b>	V <sub>AC</sub> : 249 – 528 V <sub>RMS</sub> V1 Load: 0 – 16.7 A (24 V) 0 – 11.11 A (36 V) 0 – 8.33 A (48 V) V2 Load: 0 – 1 A 5V <sub>SB</sub> Load: 0 – 2 A	-	-	±2	%V1
<b>5V<sub>SB</sub> Load-Line-Cross regulation</b>	V <sub>AC</sub> : 249 – 528 V <sub>RMS</sub> V1 Load: 0 – 16.7 A (24 V) 0 – 11.11 A (36 V) 0 – 8.33 A (48V) V2 Load: 0 – 1 A 5V <sub>SB</sub> Load: 0 – 2 A	-	-	±5	%5V <sub>SB</sub>
<b>V1 Line Regulation</b>	V <sub>AC</sub> : 249 – 528 V <sub>RMS</sub>	-	-	±0.1	%V1
<b>Transient Response (Voltage Deviation) V1, 5V<sub>SB</sub></b>	25 % load changes at 1 A/μs 24 V at 1000 μF Load / I <sub>OUT</sub> > 0.5 A 36 V at 820 μF Load / I <sub>OUT</sub> > 0.5 A 48 V at 560 μF Load / I <sub>OUT</sub> > 0.5 A 5 V <sub>SB</sub> at 560 μF Load / I <sub>OUT</sub> > 0.1 A	-	-	±5	%V1 %5V <sub>SB</sub>
<b>V1 Ripple &amp; Noise</b>	All models, Peak-to-peak, 20 MHz BW 100 nF ceramic and 10 μF tantalum caps at the load	-	-	1	%V1
<b>Start-up Rise Time</b>	249 < V <sub>AC</sub> < 528, any load conditions for V1, V2, 5 V <sub>SB</sub>	2	-	80	ms
<b>Start-up Delay</b>	V1 in regulation after PS_ON is asserted V1 in regulation after AC is applied 5 V <sub>SB</sub> in regulation after AC is applied	-	-	0.2 1.7 1.5	s
<b>Turn-on Overshoot</b>	At 500 mA output current, V1 in regulation within 50 ms	-	10 10 10	-	%V1 %V2 %V <sub>SB</sub>
<b>V1 Hold-up Time</b>	277/347/480 V <sub>AC</sub> , full load 277/347/480 V <sub>AC</sub> , 365 W load 277/347/480 V <sub>AC</sub> , 200 W load	-	16 20 35	-	ms
<b>Minimum Load (*)</b>	All models; V1, V2 and 5V <sub>SB</sub>	0	-	-	A
<b>V1 Maximum Load Capacitance</b>	277/347/480 V <sub>AC</sub> , 25 °C ambient 24 V 36 V 48 V	-	-	16.000 10.000 7.000	μF


(\*) when the load on the main output is less than 100 mA, V2 output voltage might regulate below its minimum value. Contact ENEDO for details.

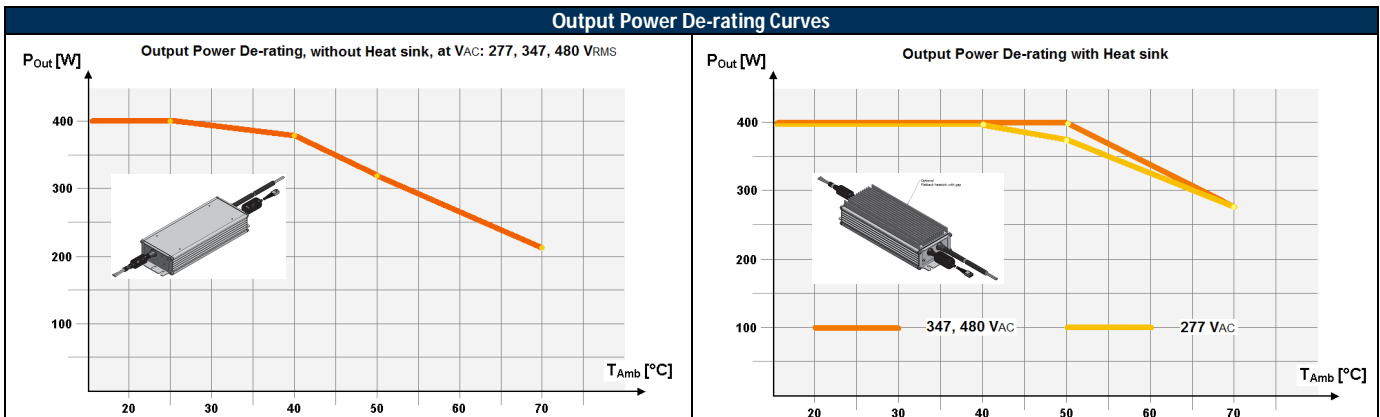

## SIGNALS / CONTROLS


Signal	Notes	Min	Typ	Max	Unit
PS_ON	Active low, +5 V TTL signal compatible. Input low voltage	0	-	2.0	V
	Input high voltage (I <sub>IN</sub> = 200 μA)	3.0	-	-	V
	V1 and V2 disabled when PS_ON is open 5 V <sub>SB</sub> not affected by PS_ON V1 and V2 enabled with PS_ON connected to RTN				
P_OK	+5 V TTL compatible				
	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (100 μA sourcing)	2.4	-	5.5	V
	P-OK Delay Time after V1 in regulation (T3 of the below graph)	50	-	100	ms
5V <sub>SB</sub> output	Power down warning time	1	-	-	ms
	Active and in regulation after a 249<V <sub>AC</sub> <528 is applied 5 V <sub>SB</sub> not affected by PS_ON	-	-	1.5	s

## SIGNALS TIMINGS

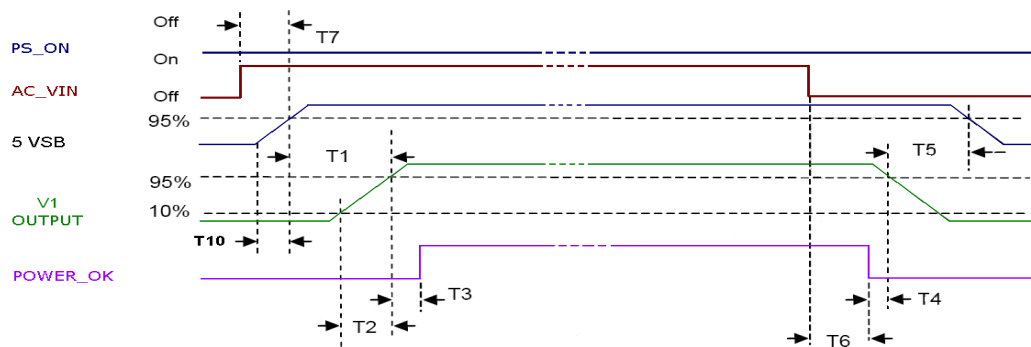

Above waveforms are expected with AC Input ON/OFF:

5V <sub>SB</sub> On – V1 On	40 ms ≤ T1 ≤ 200 ms
V1 Rise Time	2 ms ≤ T2 ≤ 80 ms
5V <sub>SB</sub> Rise Time	4 ms ≤ T10 ≤ 40 ms
V1 On – Power_OK delay	50 ms ≤ T3 ≤ 100 ms
Power down warning <sup>1</sup>	T4 ≥ 1 ms
V1 off – 5V <sub>SB</sub> Off	T5 ≥ 500 ms (V1 load > 200 W)
AC Off – P_OK low	T6 ≥ 15 ms (277/347/480 Vac)
AC_On – 5V <sub>SB</sub> On time	T7 ≤ 1.5 s (249 to 528Vac)

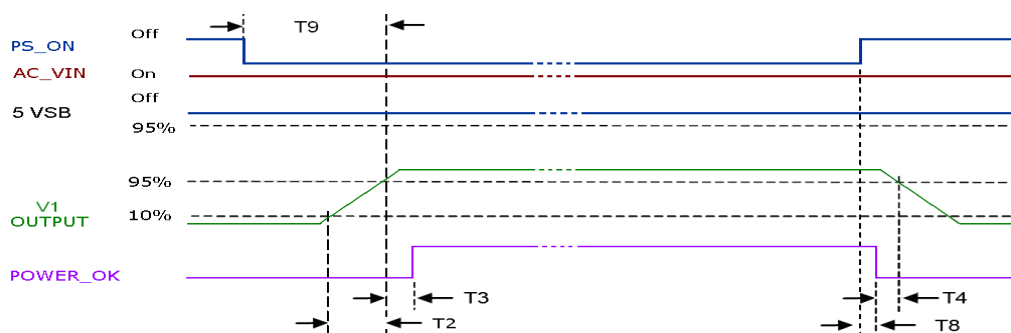

Above waveforms are expected with PS\_ON Signal ON/OFF state change:

V1 Rise Time	2 ms ≤ T2 ≤ 80 ms
V1 On – P_OK delay	50 ms ≤ T3 ≤ 100 ms
Power down warning <sup>1</sup>	15 ms ≤ T4 ≤ 30 ms
PS_ON - Power down warning	T8 ≤ 2 ms
PS_ON – V1 On delay	T9 ≤ 200 ms


<sup>1</sup> T4 parameter measurement setup will assume 100% of the maximum load on each output (400W max total power).

## PROTECTION FEATURES

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Input Under Voltage Lockout	Auto Recovery, Hiccup Mode	175	195	-	V <sub>AC</sub>
Input Fuse	2x Time Lag, 500 Vac/400Vdc on ACL1 and ACL2	-	-	5.0	A
Over Current 277/347/480 V <sub>AC</sub>	V1: Hiccup mode, auto-recovery	106	-	118	%
	V2: PTC limiting, auto-recovery	-	-	-	%
Short Circuit 277/347/480 V <sub>AC</sub>	5 V <sub>SB</sub> : Hiccup mode, auto-recovery	125	-	250	%
	V1: Hiccup mode, auto-recovery	-	-	-	
Over Voltage	V2: PTC limiting, auto-recovery	-	-	-	
	5 V <sub>SB</sub> : Hiccup mode, auto-recovery	125	-	140	%V <sub>NOM</sub>
Over Temperature (on primary stage)	V1: Hiccup mode, auto-recovery	120	-	160	%V <sub>NOM</sub>
	5 V <sub>SB</sub> : Hiccup mode, auto-recovery	-	-	-	
Over Temperature (on secondary side)	Hiccup mode with auto-recovery	-	-	-	
Isolation Input-Output	Reinforced	4242	-	-	V <sub>DC</sub>
	Not tested in production	-	-	-	
Isolation Input to Earth	Basic	2780	-	-	V <sub>DC</sub>

## ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
Operating Temperature Range		-35	-	50	°C
De-rated Operating Temperature Range	Without heat-sink (277/347/480 V <sub>AC</sub> )				
	400 W at 25 °C 375 W at 40 °C Linear derating from 40 °C to 70 °C 320 W at 50 °C 215 W at 70 °C				
Storage Temperature Range	With heat-sink (480 V <sub>AC</sub> )				
	400W up to 50 °C Linear derating from 50 °C to 70 °C 275 W at 70 °C				
Humidity	RH, Non-condensing Operating	-	-	90	%
Operating Altitude	Non-operating	-	-	95	%
	Shock	-	-	4000	m
Vibration	<b>EN 60068-2-64</b>				
	Operating: 5-500 Hz, 1 GRMS (0.002 g <sup>2</sup> /Hz), 3 axes, 30 min. Non-Operating: 5-500 Hz, 2.46 GRMS (0.0122 g <sup>2</sup> /Hz), 3 axes, 30 min.				
MTBF	<b>EN 60068-2-27</b>				
	Operating: 30 G /18 ms HALF SINE, 3 axes, 6x axes (3 positive and 3 negative). Non-Operating: 50 G /11ms HALF SINE, 3 axes, 6x axes (3 positive and 3 negative).				
Useful Life	277/347/480V <sub>AC</sub> , Full load, 40°C ambient	-	400.000	-	Hours
	80% Duty cycle, Telcordia SR-332 Issue 2	-	52.000	-	Hours
Cooling	277/347/480 V <sub>AC</sub>	-	145.000	-	Hours
	300 W, 40 °C ambient, natural convection 300 W, 25 °C ambient, natural convection				
	Convection with or without heat-sink and conduction providing an adequate thermal path between the unit and the external environment. Case hot spot temperature T <sub>c</sub> shall not exceed 90 °C in any working condition.				

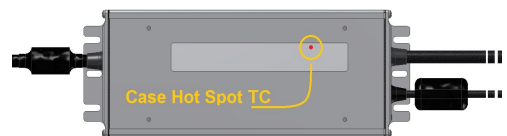


## ELECTROMAGNETIC COMPATIBILITY (EMC) - EMISSIONS

Phenomenon	Conditions / Notes	Standard	Equipment Performance Class
Conducted	277/347/480 V <sub>AC</sub> , full load	FCC Part 15	B
		EN55022	B
Radiated	At 10 m distance	EN55015	
		FCC Part 15	B
		EN55022	B
		EN55015	
Line Voltage Fluctuation and Flicker	277/347/480 V <sub>AC</sub> At 20 %, 50 % and 100 % rated load	EN 61000-3-3	
Harmonic Current Emission	277/347/480 V <sub>AC</sub> All load conditions > 100 W	EN 61000-3-2	C

## ELECTROMAGNETIC COMPATIBILITY (EMC) - IMMUNITY

Phenomenon	Conditions / Notes	Standard	Test Level	Performance criteria
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	3 V/m, 80-1000 MHz, 1 KHz 80 % AM	EN 61000-4-3	3	A
Electric Fast Transient Surge	±2 kV on AC power port for 1 minute.	EN 61000-4-4	3	A
Surge	± 4kV line to line, ± 6 kV line to earth on AC power port.	EN 61000-4-5		B
Conducted RF Immunity	3 V <sub>RMS</sub> , 0,15-80 MHz, 1 kHz 80% AM	EN 61000-4-6	3	A
Dips and Interruptions	Drop-out to 0% for 10 ms	EN61000-4-11		A
	Dip to 40% for 5 cycles (100 ms)	EN61000-4-11		B
	Dip to 70% for 25 cycles (500 ms)	EN61000-4-11		B
	Interrupts > 95% for 5 s	EN61000-4-11		B


## SAFETY AGENCIES APPROVAL

Certification Body	Safety Standards and file numbers
CSA/UL	 - UL Recognized ( <i>E330583.FKSZ2,8</i> ) according to UL 8750 and CSA C22.2 No 250, suitable for dry and damp locations, rated HL, meaning Class I, Division 2 hazardous (Classified) location luminaires. Auxiliary output, I/O signals and stand by output are Class 2 rated.
CE	CE Mark for EU according to EN 60950-1, EN 62368-1. LVD 2014/35/EU

## OUTLINE DRAWING AND CONNECTIONS \_ SEALED BOX

**Overall dimensions:** Without heatsink 93.6 x 258.0 x 44.5 mm (3.69 x 10.16 x 1.75 in)  
With heatsink 93.6 x 258.0 x 59.2 mm (3.69 x 10.16 x 2.33 in)

**Weight:** Without heatsink 1900 g (4.188 lb)  
With heatsink 2185 g (4.817 lb)

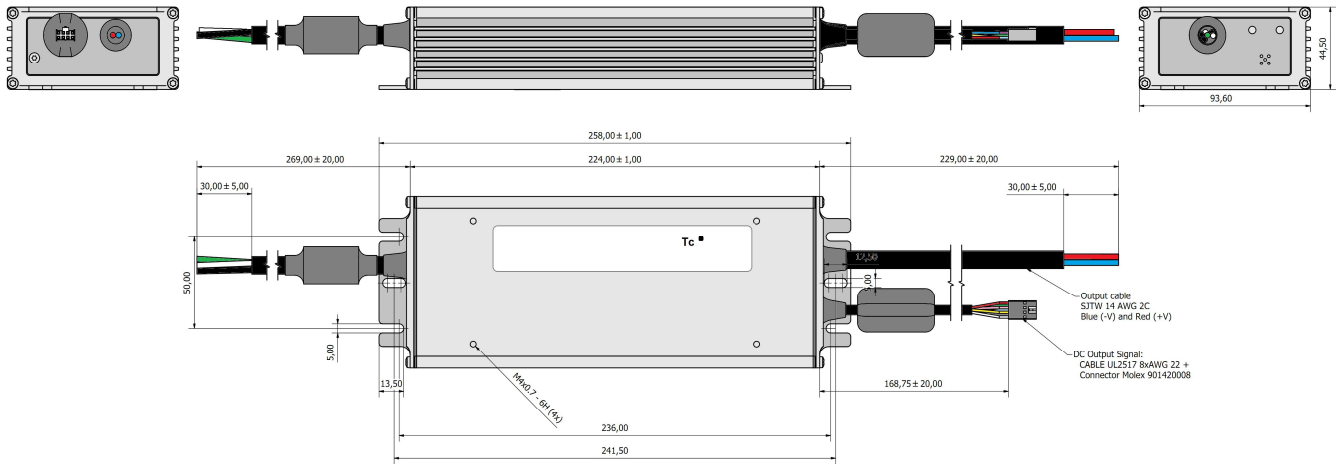

Connections	Wires Gauge and Length	Assignment	Colour/Pin
<b>AC Input</b>	STW 3X 18AWG, 105 °C – 600 V, water resistant 60 °C, stranded wires, 269.0 ± 20 mm extension from chassis.	AC L1	Black
		AC L2	White
		Protective Earth (PE)	Green
<b>DC Output</b>	SJTW 2x14 AWG 105°C/300V, water resistant 60 °C, stranded wires, 229.0±20 mm from chassis.	+V1 Output (+V1)	Red
		V1 Return (RTN)	Blue
<b>Auxiliary Voltages Control Signals</b>	Wires: SJTW 8X 22AWG, 105°C - 300V, water resistant 60°C, black external insulation, 169±20mm extension from chassis to connector.  Housed by Connector: Molex 90142-0008 Terminals: Molex 90119-0109 (Tin plating)  Mates with Molex 90130-1108 or equivalent. Terminals: Tin plating termination	+5 V Stand-by Output (+5V <sub>SB</sub> )	Red – 1
		Output Power Good (P_OK)	Green – 2
		- Fan Voltage (-V2)	Brown – 3
		Remote On/Off (PS_ON)	Grey/Purple – 4
		+ Terminal Remote Sense (+RS)	Yellow – 5
		Stand-by/Signals Return (RTN)	Blue – 6
		+ Fan Voltage (+V2)	White – 7
		Stand-by/Signals Return (RTN)	Black – 8

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.