



ADA 60W SERIES

Battery back-up power supplies 12/24/48 VDC

- Compact size • Easy to install • Safe construction • Mains connection with plug or screw terminal
- Tamper Switch • Temperature compensation • Power fail signal • Optional: n+1 redundancy



PRODUCT DESCRIPTION



The ADA 60W DC UPS units provides battery back-upped supply for security, industrial and Information technology (routers or equal with lower power). Battery charger, batteries are all included to small compact wall mountable package, which is easy and fast to install.

FEATURES

- 60W output power ranges
- 12VDC, 24VDC & 48 VDC output voltages
- ADA60W Dual model has 24VDC and 12VDC outputs
- Input voltage range 90-264VAC
- Battery capacity 12VDC/14Ah, 24V/7Ah or 48V/2Ah
- EXU extra battery units for extended backup
- Temperature compensated battery charging
- Relay alarms, charger
- Operating temperature -20°C...+45 °C with batteries

More battery capacity available with EXU extra battery unit

ADA and EXU installation side by side or one on top of another

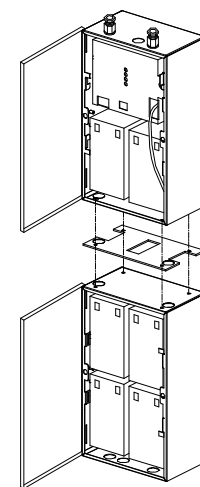

POWER SUPPLIES WITH BATTERY BACK-UP

Type	Available <u>x</u> selection codes (others on request)	Input Voltage	Nominal Output Voltage	Output Current	Battery Capacity	Installation / dimensions (Width x Height x Depth)
*) See <u>x</u> below						
ADA742 <u>x</u>	<u>x</u> = 0	90...264 VAC	12 VDC	5 A	14 Ah	Wall / 188 x 317 x 110mm
ADA743 <u>x</u>	<u>x</u> = 0, 3	90...264 VAC	24 VDC	2.5 A	7 Ah	Wall / 188 x 317 x 110mm
ADA744 <u>x</u>	<u>x</u> = 2	90...264 VAC	48 VDC	1.25 A	2 Ah	Wall / 188 x 317 x 110mm

EXU708 <u>x</u>	On request	External battery unit 12VDC 28Ah			Wall / 188 x 317 x 110mm	
EXU709 <u>x</u>	On request	External battery unit 24VDC 14Ah			Wall / 188 x 317 x 110mm	
EXU710 <u>x</u>	On request	External battery unit 48VDC 7Ah			Wall / 188 x 317 x 110mm	

x selection code: 0 = with batteries / without tamper switch 1 = without batteries / without tamper switch
 2 = with batteries / with tamper switch 3 = without batteries / with tamper switch

INPUT

Input voltage range	90...264 VAC
Frequency	45...65Hz
Efficiency ($U_{in} = 230$ VAC, 100% load)	82% - 85%
Safety	EN 62368-1
Isolation:	input / ground input / output output / ground
Inrush-current	1500 VAC RMS 50Hz, 1min 3000 VAC RMS 50Hz, 1min 500 VDC
Over voltages	Limited by 7R NTC-resistor
Input fuse	Protected by 275V 72J VDR-resistor
Approvals	T2A CE-marking

OUTPUT

	12 V	24 V	48V
Charging voltage (50% load)	13.7 V	27.3 V	54.6 V
Output adjustment (user adjustable)	10.5...15 V	21...29 V	45...58 V
Ripple voltage ($f = 20$ Hz...300kHz, $T_{amb} = 25^{\circ}\text{C}$)	<10mV _{rms}	<10mV _{rms}	<15mV _{rms}
Load regulation ($I_{out} = 10...100\%$)	$\pm 1\%$	$\pm 0.5\%$	$\pm 0.5\%$
Line regulation ($U_{inmin}...U_{inmax}$)	$\pm 0.1\%$	$\pm 0.1\%$	$\pm 0.1\%$
Output current at charging voltage	≥ 4.4 A	≥ 2.2 A	≥ 1.1 A
Current limit, charger	< 8 A	< 4 A	< 2 A
Short circuit current limiting, battery	Fuse 10A	Fuse 6.3A	Fuse 4A

BATTERY BACK-UP

	12 V	24 V	48V
Battery capacity	14Ah	7Ah	2Ah
Battery type Genesis / Yuasa	NP 7-12 7Ah 12V	NP 7-12 7Ah 12V	NP 2-12 2Ah 12V
Battery back-up time (typical)	4A / 3h 1A / 12h	2A / 3h 0.5A / 12h	1A / 1.5h 0.25A / 7h
Temperature compensation for battery	NTC-resistor 2k2	NTC-resistor 2k2	NTC-resistor 2k2

INDICATIONS AND ALARMS

Charger output OK	Green LED is on
Power Fail (mains failure, charger failure or charger in current limiting mode)	Potential free open and closing relay contacts; Relay 24VDC/0.3A or 30VAC/0.5A
Door open tamper switch (if ordered)	Mircroswitch, open and closing contact

MECHANICS

Dimensions	See table on first page
Mounting	Wall / screw mounting
Weight	Without batteries 2kg With batteries 12V/7kg, 24V/7kg, 48V/5kg
Locking of the cover	By tool (screwdriver)
Enclosure	Steel case Ip21

ENVIRONMENTAL

Operation temperature	-40°C...+55 °C without batteries -20°C...+45 °C with standard batteries
Humidity	85% RH IEC68-2-30
Ventilation	Natural convection

CONNECTORS

Input	2.5mm ² 3-pole screw terminal (L-N-PE) Inlet through the cover, 1.5m power cord included
Output	2.5 mm ² 2-pole screw terminal (+, -), Inlet through the cover
Battery	2.5 mm ² 2-pole screw terminal (+, -)
Power fail alarm and battery temp.comp	2.5 mm ² 5-pole screw terminal (Alarm NO, NC, COM, Temp.comp), Inlet through the cover, NTC resistor included in installation kit

Enedo Headquarters

Martinkyläntie 43
01720 Vantaa
Finland

Tel: +358 9 478 466
info@enedopower.com

www.enedopower.com

brochure time/version: 2021/12