

DESCRIPTION

STRATO switch mode driver technology is designed to generate one constant current output from a wide range AC input. The size and performance of these products make them the ideal choice for LED lighting applications. This series is not allowed to work in standby mode and is not intended for no-load operation.

MAIN FEATURES

- Wide Input Range: 120/220-240/277 V_{AC}
- Constant Current Output
- High Efficiency up to 91 %
- Compact Design
- Trimable Output Current Settings
- Dimmable with 0-10 V / 1-10 V Dimmers
- Over-Temperature Protection for LEDs (NTC)
- Convection Cooled
- Wide Operating Temperature Range
- SELV¹
- Long Life
- RoHS Compliant
- Compliance with Regulation (EU) 2019/2020 (Ecodesign)



¹ only RSLD070-14 and RSLD070-25 versions


APPLICATIONS AND BENEFITS

STRATO is designed for directly powering LEDs in commercial & industrial lighting applications.

The product's extremely **small form factor** and **high efficiency** makes it suitable for integration into most light fixtures and standard electrical junction boxes.

A host of integrated **control features**:

- Simplify Light Fixture Design
- Ease Safety Approval Cycles
- Lower Fixture Complexity and Cost

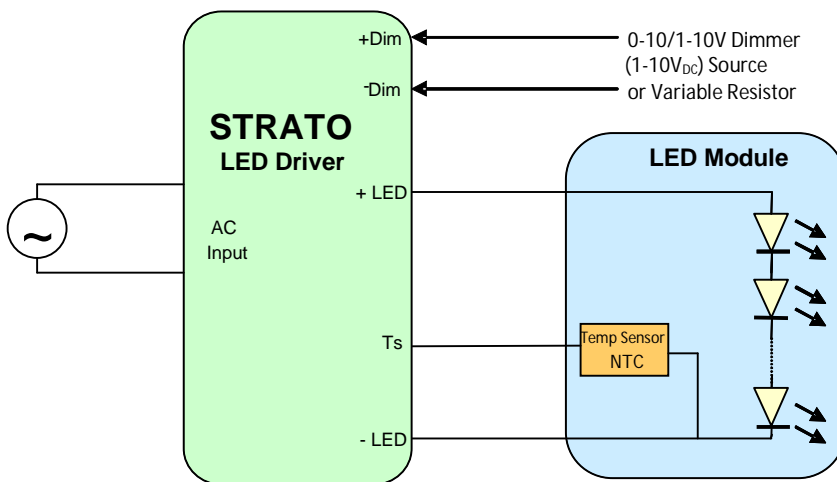

STRATO's versatile control features:

- A Temperature sensor (NTC thermistor) protects the LED from over-temperature.
- A 2 wire Dimming input provides both output trimming, and 10-100 % I_{out} Dimming function.

MODEL CODING AND OUTPUT RATINGS

Model number	I _{OUT} Max [mA]	P _{OUT} Max [W]	Absolute Minimum V _{OUT} ² [V _{DC}]	Output Operative Voltage Range ² [V _{DC}]	No Load V _{OUT} [V _{DC}]	Typical Efficiency ³ (%)
RSLD070-45	350	55	113	116.4 ÷ 158	190	91
RSLD070-25	700	61	63	64.9 ÷ 88	100	91
RSLD070-14	1400	65.8	33	34.0 ÷ 47	60	91

Table 1: Driver Ratings

² The Output Operative Ranges have been specified in order to avoid possible hiccup phenomena at lower limits determined by certain working conditions (maximum LED temperature, minimum output current). However, the drivers can operate between the Absolute Minimum V_{OUT} and V_{OUT} (max) limits.

³ at max load, 230V_{AC}

CONTROLS

Output Controls: Two dedicated inputs provide control and safety features.

Dim: A dimming input can be used to adjust the output setting via a standard commercial wall dimmer, an external control voltage source (1 to 10 V_{DC}), or a variable resistor when using the recommended number of LEDs. The input permits 100 % to 80 % trimming and 100 % to 10 % dimming. This permits active control of the driver and may be used for trimming and dimming purposes. See STRATO **Application Note #1** for details on functionality and compatibility with standard industry practices.

Ts: The Temperature input may be connected to a 100k NTC thermistor. The thermistor should be located on the LED assembly to monitor its temperature. If the temperature exceeds a predetermined set point, the output current of the module is automatically reduced to regulate the temperature of the LED at a safe level. See STRATO **Application Note #1** for details.

INPUT AND OUTPUT SPECIFICATION

Specification	Test Conditions / Notes	Min	Nom	Max	Units
AC Input Voltage	120/220-240/277 V _{AC} Device starts and operates at 90 V _{AC} at all load conditions	90	120/220-240/277	305	V _{AC}
Input Frequency		47	50/60	63	Hz
Input Current	120 V _{AC} Rated Load	-	-	0.65	A
	230 V _{AC} Rated Load	-	-	0.34	
	277 V _{AC} Rated Load	-	-	0.30	
Power Factor	120 V _{AC}	0.9	-	-	
	230 V _{AC} at Nominal Load	0.9	-	-	
	277 V _{AC} at 80-100 % rated current	0.9	-	-	
THD³	120/220-240/277 V _{AC}	-	-	20	%
Inrush Current (peak)	120 V _{AC} Half Value time: 150 μs	-	-	13.4	A
	230 V _{AC} Half Value time: 190 μs	-	-	27.9	
	277 V _{AC} Half Value time: 130 μs	-	-	31.0	
Efficiency	120 V _{AC} Rated Load	-	91	-	%
	230 V _{AC} Rated Load	-	91	-	
	277 V _{AC} Rated Load	-	91	-	
Harmonic Current	Complies with EN-61000-3-2, Class C load >25 W with output voltage between 93 % and 100 %				

³ Total Harmonic Distortion (THD) <20 % with output voltage between 93 % and 100 % and 100 % rated output current

OUTPUT SPECIFICATIONS


Specification	Test Conditions / Notes	Min	Nom	Max	Units
Output Power Rating	check Model Coding and Output Ratings table	55	-	65.8	W
Output Voltage	check Model Coding and Output Ratings table	33	-	158	V
Output Current	check Model Coding and Output Ratings table	350	-	1400	mA
Ripple Current	All models measured (I _{OUT-PK} /RMS)	-	-	45	%
Output Regulation		-	-	±3	%I _{OUT}
Start-up time	With no dimmer connected	-	-	500	ms

PROTECTION FEATURES

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Output Over Voltage		110	-	130	%V _{MAX}
Output Short-Circuit	Hiccup, auto Recovery	-	-	-	-
Over-Temperature Tc	Hiccup, auto Recovery if the PSU exceeds the rated Tc temperature		90		°C
No Load	Check No Load Voltage in Table 1	60		250	V
Isolation Primary-to-Secondary	Reinforced/double Insulation meets IEC/EN61347-2-13 Class II				


MECHANICAL DETAILS

- Packaging Options:** Partially Encapsulated with ABS plastic body enclosure
- I/O Connections:** Flying leads, 18AWG on power leads, 20AWG on control leads, 152 mm long, 105 °C Rated, Stranded, Stripped by approximately 9.5mm and tinned. Double insulation input wires.
- Ingress Protection:** IP20, UL damp rated
- Mounting Details:** Universal Mounting Clips, and 6 mounting locations per package allow installer to choose the most suitable position for the mounting feet. 2x clips RHML000686-xx included (additional clips upon request).

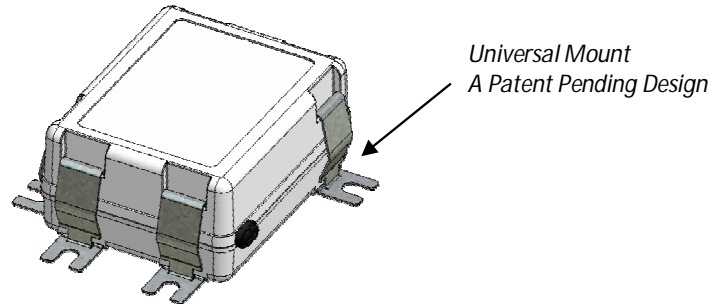

OUTLINE DRAWINGS

- Package:** RSLD070
- Dimensions:** 70 x 57 x 32 mm (2.76 x 2.24 x 1.26 in)
- Volume:** 128 cm³ (7.54 in³)
- Mass:** 170g (6 oz)

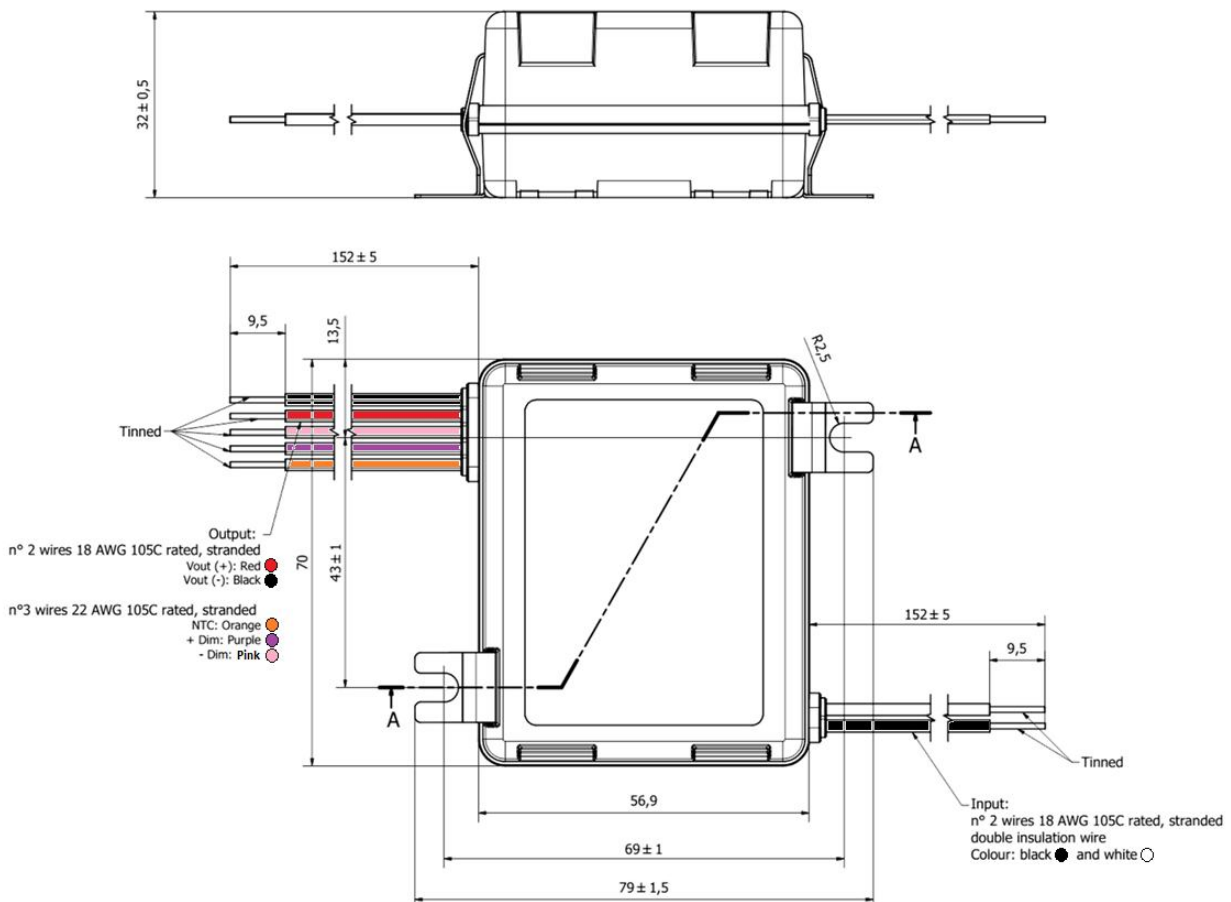

ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Top Case Temperature Range	Top case temperature without derating	-30	-	90	°C
Ambient Temperature Range	As long as Tc temperature is within the limits	-30	-	50	°C
Storage Temperature		-40	-	85	°C
Operating Relative Humidity	Non-condensing	5	-	95	%
Surface Temperature	Exposed surfaces temperature under all operating conditions	-	-	90	°C
Cooling	Convection cooled				
Shock EN 60068-2-27	Operating: Half sine, 30g, 18ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50g, 11ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration EN 60068-2-64	Operating: 5 – 500Hz, 1gRMS (0.02g ² /Hz), 3 axes, 30 min. Non-Operating: 5 – 500Hz, 2.46gRMS (0.0122g ² /Hz), 3 axes, 30 min.				
Vibration EN 60068-2-6	Operating Sine, 10 – 500Hz, 1g, 3 axes, 1 oct/min., 60 min.				
MTBF	Typical Load, 70 °C Tc, MIL.HDBK-217E	-	250.000	-	Hours
Useful Life	Nominal V _{AC} , 70 °C Tc Nominal Load	-	50.000	-	Hours


ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Performance Class
Conducted Emission	Test at 120 V _{AC}	EN55022; FCC Part 15	Class B
	Test at 230 V _{AC}	EN55015	-
	Test at 277 V _{AC}	EN55022; FCC Part 15	Class A
Radiated Emission	Test at 120 V _{AC}	FCC CFR47-part15	Class B
	Test at 230 V _{AC}	EN55015	-
	Test at 277 V _{AC}	FCC CFR47- part 15	Class A
Harmonic Current Emissions		EN61000-3-2	Class C
Voltage Changes, Fluctuation and Flicker		EN61000-3-3	

ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Note
Equipment for general lighting purposes -EMC Immunity Req.		EN 61547	
ESD (Electrostatic Discharge)		EN 61000-4-2	
Radiated Radio-Frequency electromagnetic field		EN 61000-4-3	
Electric Fast Transient / Burst	Level ±1.0 kV L-L	EN 61000-4-4	
Surge	Level ±1.0 kV L-L	EN 61000-4-5	
Conducted disturbances induced by Radio-Frequency fields		EN 61000-4-6	
Voltage Dips, short interruptions and Voltage Variations		EN 61000-4-11	
Non-repetitive damped oscillatory transient, Ring wave	2.5 kV	ANSI C.62.41	Category A

SAFETY AGENCY APPROVALS

Certification Body	Safety Standards
	UL Recognized ANSI / UL8750, CSA C22.2 No.250.13 Models with output voltages <math><60 V_{DC}</math> include UL and CSA approval (cURus) as Class 2 output LED Driver suitable for dry and damp location
	IEC/EN 62384 Electronic control gear for LED modules – Performance Requirements IEC/EN, 61347-1, IEC/EN 61347-2-13 Electronic control gear for LED Modules – Safety
	To obtain the “CE Declaration of Conformity” please contact info@enedopower.com
	IECEE CB Certified, IEC/EN, 61347-1, IEC/EN 61347-2-13 electronic control gear for LED Modules All models are isolated control gears, SELV equivalent, with internal reinforced insulation as per IEC/EN 61347-2-13 Drivers to be incorporated in the luminaire
	Reinforced/double Insulation meets IEC/EN61347-2-13 Class II

Specifications appearing in ENEDO’s catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.